


RO SHAM BEAUX

ASSEMBLY INSTRUCTIONS

FIONA SEMI FLUSH

We ALWAYS recommend installation by a licensed electrician

PARTS

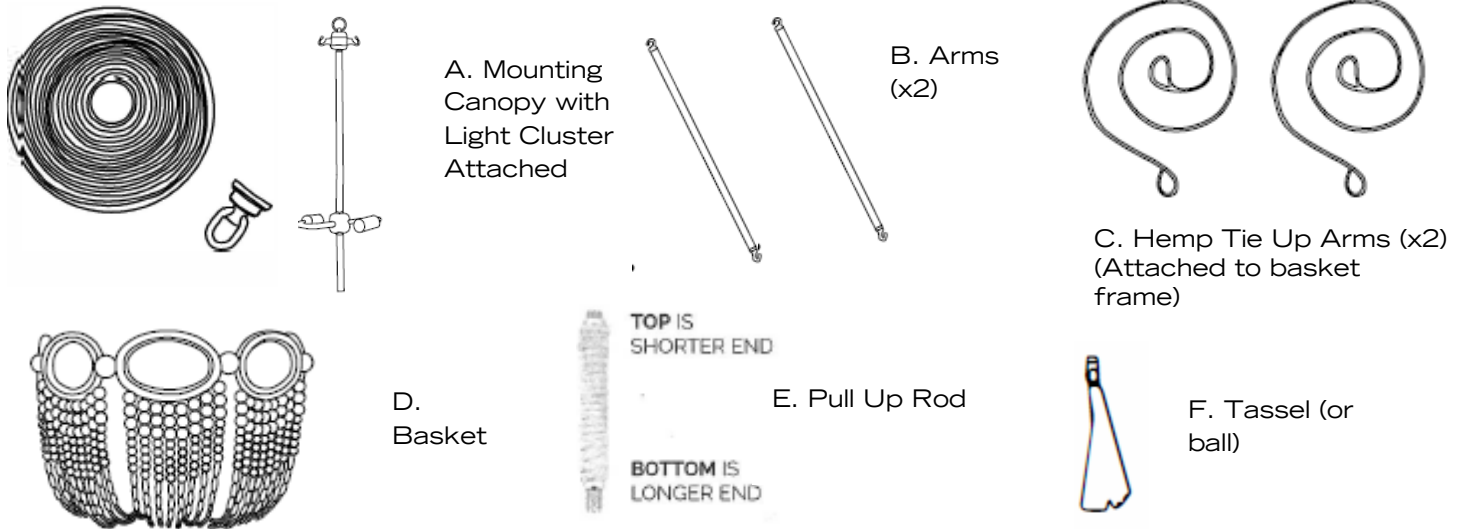

ASSEMBLY

1. Disconnect power and mount Canopy with attached Light Cluster (A) to the ceiling.
2. Thread electrical. (Ground Wire= Small Tin Uncoated Wire / Positive Wire = Grey Coated Wire)
3. Attach Arms (B) to top of Light Cluster (A).
4. Lift Basket (D) and attach Arms (B) to hoops on Frame. Find Hemp Tie Up Arms (C) located on Frame and attach to top of Light Cluster (A).
5. Attach top of Pull Up Rod (E) to Bottom of Light Cluster (A) using the shorter end.
6. Lift small hemp wrapped wheel at bottom of basket (D) threading over bottom of pull up rod (E).
7. While holding the wheel in place, attach Tassel (F) to the bottom threads of Pull Up Rod (E). This should secure the bottom of basket (D) to Pull Up Rod (E), allowing it to "buckle".