


RO SHAM BEAUX

ASSEMBLY INSTRUCTIONS

MALIBU SEMIFLUSH WITH ARMS

We ALWAYS recommend installation by a licensed electrician

PARTS

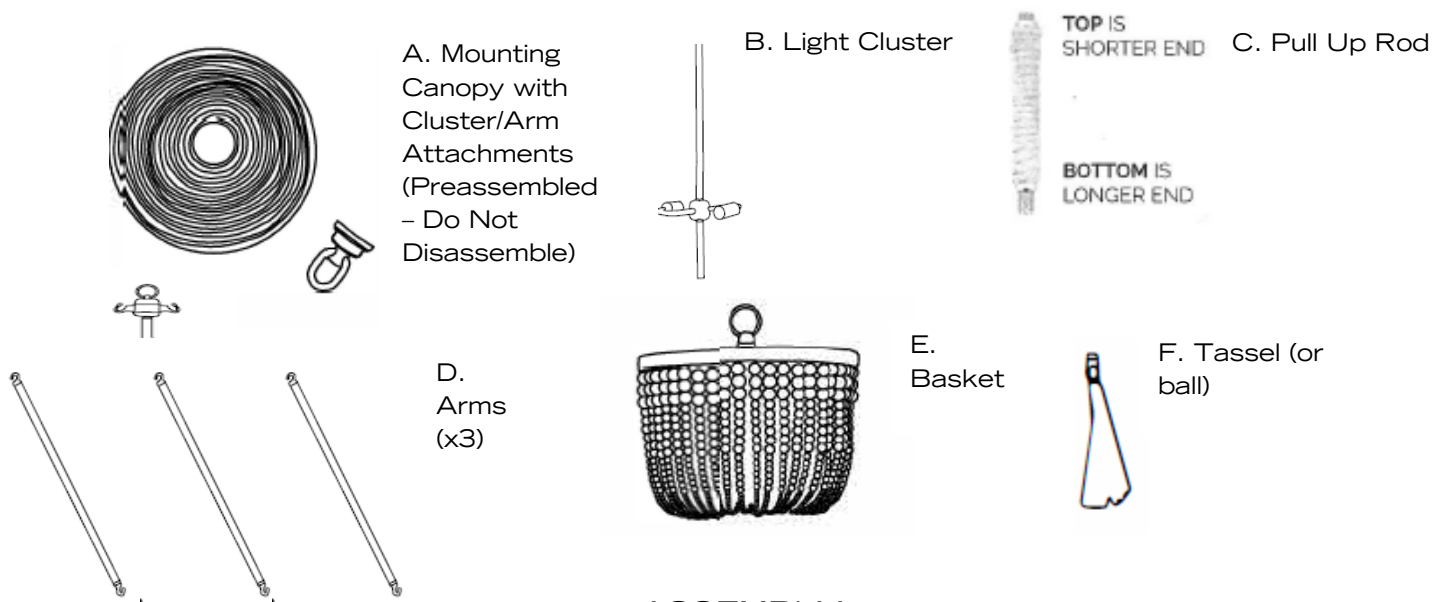

ASSEMBLY

1. Disconnect power and mount Canopy (A) to the ceiling.
2. Attach light cluster (B) to Canopy and thread electrical through it. (Ground Wire= Small Tin Uncoated Wire / Positive Wire= Grey Coated Wire)
3. Attach arms (D) to canopy
4. Lift Basket (E) and attach bottom of Arms (D) to hoops on top of basket (E).
5. Attach top of Pull Up Rod (C) to Bottom of Light Cluster (B) using the shorter end.
6. Lift small hemp wrapped wheel at bottom of basket (E) threading over bottom of pull up rod (C).
7. While holding the wheel in place, attach Tassel (F) to the bottom threads of Pull Up Rod (C). This should secure the bottom of basket (E) to Pull Up Rod (C), allowing it to "buckle".